

RUBBER FLOORINGS ROUND DOT (NBR)

PRODUCT NAME AND CODE

ROUND DOT SCP Select [WMN]

TECHNICAL SPECIFICATION


QUALITY	NBR / SBR
THICKNESS	3 mm
PRODUCT FORM	Roll 1,2 x 10m
SPECIFIC GRAVITY	1,5-1,6 g/cm ³
HARDNESS	65 +/-5 Sha
COLOUR	black
TEMPERATURE	-30°C / +80°C
TENSILE STRENGTH	2-3 MPa
ELONGATION AT BREAK	100-150%
OZONE/UV RESISTANCE	none
RESISTANCE TO THERMAL AGEING	none
RESISTANCE TO OILS AND FUELS	good *
TOLERANCE FOR SPECIFIED VALUES +/- 3% UNLESS OTHERWISE STATED IN THE DATA SHEET	

INFORMATION

The information contained in the material data sheet is based on our best knowledge and the results of internal tests. They are indicative and do not constitute a definite guarantee of the properties shown.

The information provided is an indication and cannot be regarded as binding.
We recommend that you carry out verification tests yourself before using the product.

*compared to a general-purpose SBR rubber sheet

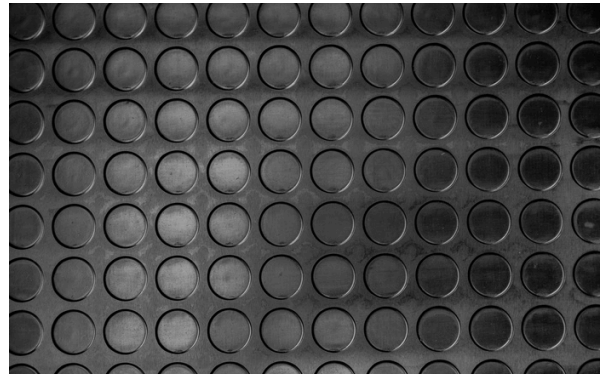

BRAND

SCPSELECT

SCP Ltd

PRODUCT SPECIFICATION

- Made of acrylonitrile-butadiene rubber referred to as oil-RESISTANCE rubber.
- A product with anti-slip, insulating and protective properties.
- Thanks to its flexibility, it adapts well to the ground.
- It has a reflective fabric structure on the underside which increases the effectiveness of the bonding to the substrate when required.
- Each roll is individually wrapped in foil or a bag with a label identifying the product and production batch.
- The product is non-alkaline.

STORAGE CONDITIONS

- It is recommended to store the product in warehouse conditions at a temperature of +10 to +25°C.
- Avoid direct sunlight and contact with media that react with rubber: oils, greases, solvents, fuels, acids, etc.
- It is allowed to store the rolls in layers, but not more than four levels.

COMPLIANCE



DISTRIBUTOR

SCP
Rubber Solutions

SCP Ltd | ul. Turystyczna 1, 43-155 Bieruń | www.scp1.pl

ROUND DOT (NBR)