

RUBBER FLOORINGS ROUND DOT (SBR)

PRODUCT NAME AND CODE

ROUND DOT SCP Select [WM]

TECHNICAL SPECIFICATION


QUALITY	SBR				
THICKNESS / PRODUCT FORM	3 mm	1,0x10m	1,2x10m	1,4x10m	1,6x10m
	4 mm		1,2x10m	1,4x10m	
	5 mm		1,2x10m	1,4x10m	
SPECIFIC GRAVITY	1,5 g/cm ³				
HARDNESS	70 +/-5 Sha				
COLOUR	black				
TEMPERATURE	20°C / +70°C				
TENSILE STRENGTH	3 MPa				
ELONGATION AT BREAK	150%				
OZONE/UV RESISTANCE	none				
RESISTANCE TO THERMAL AGEING	none				
RESISTANCE TO OILS AND FUELS	none				
TOLERANCE FOR SPECIFIED VALUES +/- 3% UNLESS OTHERWISE STATED IN THE DATA SHEET					

INFORMATION

The information contained in the material data sheet is based on our best knowledge and the results of internal tests. They are indicative and do not constitute a definite guarantee of the properties shown.

The information provided is an indication and cannot be regarded as binding.

We recommend that you carry out verification tests yourself before using the product.

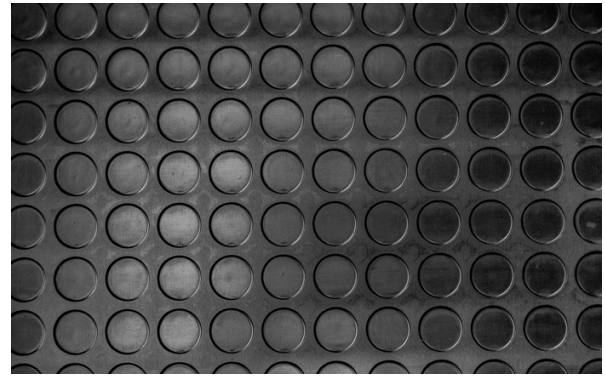

BRAND

SCPSELECT

SCP Ltd

PRODUCT SPECIFICATION

- Made from an SBR rubber base. It is a styrene butadiene rubber, usually referred to as general purpose rubber.
- A product with anti-slip, insulating and protective properties.
- Thanks to its flexibility, it adapts well to the ground.
- It has a reflective fabric structure on the underside which increases the effectiveness of the bonding to the substrate when required.
- Each roll is individually wrapped in foil or a bag with a label identifying the product and production batch.
- The product is non-alkaline.

STORAGE CONDITIONS

- It is recommended to store the product in warehouse conditions at a temperature of +10 to +25°C.
- Avoid direct sunlight and contact with media that react with rubber: oils, greases, solvents, fuels, acids, etc.
- It is allowed to store the rolls in layers, but not more than four levels.

COMPLIANCE



DISTRIBUTOR

SCP
Rubber Solutions

SCP Ltd | ul. Turystyczna 1, 43-155 Bieruń | www.scp1.pl

ROUND DOT (SBR)