


RUBBER FLOORINGS ROUND DOT (TPE)

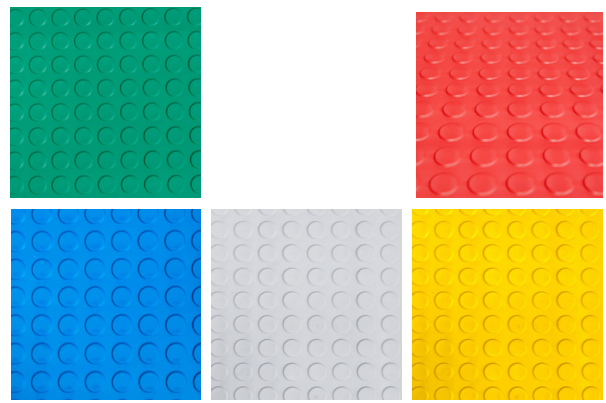

PRODUCT NAME AND CODE

ROUND DOT SCP Select [WMT]

TECHNICAL SPECIFICATION

QUALITY	TPE				
THICKNESS	3 mm				
PRODUCT FORM	Roll 1,2 x 10m				
COLOUR	BLUE	RED	GREEN	YELLOW	GREY
SPECIFIC GRAVITY	1 - 1,2g/cm3				
HARDNESS	65 +/-5 Sha				
TEMPERATURE	-30°C / +70°C				
TENSILE STRENGTH	3,0 - 4,0 MPa				
ELONGATION AT BREAK	200%				
OZONE/UV RESISTANCE	high *				
RESISTANCE TO THERMAL AGEING	high *				
TOLERANCE FOR SPECIFIED VALUES +/- 3% UNLESS OTHERWISE STATED IN THE DATA SHEET					

BRAND

SCPSELECT

SCP Ltd

PRODUCT SPECIFICATION

- TPE is a thermoplastic elastomer with improved mechanical strength and chemical resistance.
- Products with anti-slip properties.
- Available in several intense colours.
- Thanks to its flexibility, it adapts well to the surface and can be easily cut to the desired size.
- It has a fine mesh structure on the underside, which increases the effectiveness of bonding to the substrate when required.
- Each roll is packaged in a transparent plastic bag with a label.
- Non-tacky product.

STORAGE CONDITIONS

- It is recommended to store the product in warehouse conditions at a temperature of +10 to +25°C.
- Avoid direct sunlight and contact with media that react with rubber: oils, greases, solvents, fuels, acids, etc.
- It is allowed to store the rolls in layers, but not more than four levels.

COMPLIANCE



INFORMATION

The information contained in the material data sheet is based on our best knowledge and the results of internal tests. They are indicative and do not constitute a definite guarantee of the properties shown.

The information provided is an indication and cannot be regarded as binding.

We recommend that you carry out verification tests yourself before using the product.

*compared to a general-purpose SBR rubber sheet

DISTRIBUTOR

SCP
Rubber Solutions

SCP Ltd | ul. Turystyczna 1, 43-155 Bieruń | www.scp1.pl

ROUND DOT (TPE)