


REGRANULATE SHEETS

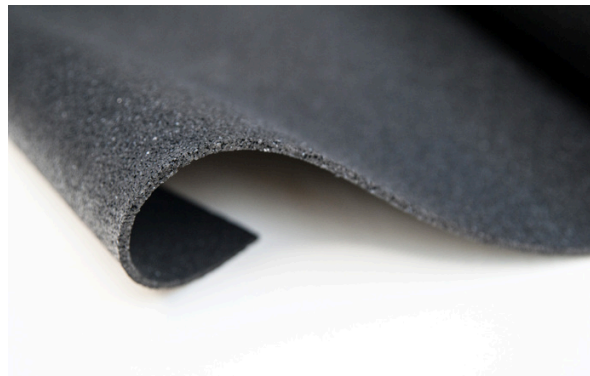

PRODUCT NAME AND CODE

Regranulate SCP Select [R]

TECHNICAL SPECIFICATION

COLOUR	BLACK			
MATERIAL	RUBBER GRANULATE SBR + POLYURETHANE BINDER			
AREA WEIGHT	0,75 [kg/m2/1mm]	0,86 [kg/m2/1mm]	0,95 [kg/m2/1mm]	1,05 [kg/m2/1mm]
WIDTH	1 [m]			
MINIMUM DENSITY	750 [kg/m3]	860 [kg/m3]	950 [kg/m3]	1050 [kg/m3]
TENSILE STRENGTH		min. 650		
ELONGATION AT BREAK		min. 55		
FIRE BEHAVIOUR	Efl			
ELECTRICAL RESISTANCE	STATIC DISSIPATIVE			
THERMAL CONDUCTIVITY COEF. λ	0,17 [W/(mK)]			
THERMAL RESISTANCE R	0,15 [m2 K/W]			
SHOCK ABSORPTION				15 [%] FOR 10mm THICKNESS
DYNAMIC FRICTION COEFFICIENT	MIN. 0,65 (≥ 0,3) TECHNICAL CLASS DS			
WATERPROOF	THE PRODUCT IS NOT WATERPROOF			

THE TOLERANCE FOR THE GIVEN VALUES IS ± 5% UNLESS IT IS DIFFERENT IN THE CARD

BRAND

SCP SELECT

SCP Ltd

PRODUCT SPECIFICATION

- Rubber granulate SBR + polyurethane binder
- Versatile insulation, damping and anti-slip applications.
- Products have the Ministry of Health and Safety requirements from 12.03 1996 about VOC content and can be used indoors intended for people (categories A and B). Materials are not subject to mandatory classification.
- The products are not subject to REACH classification and do not contain substances classified as hazardous.

STORAGE CONDITIONS

- It is recommended to store the product under storage conditions of +10 to +25°C.
- Avoid direct sunlight and contact with media reacting with the rubber: oils, greases, solvents, fuels, acids, etc.
- It is permissible to store the rolls in layers, but not more than four levels.

COMPLIANCE



INFORMATION

The information contained in the material data sheet is based on our best knowledge and the results of internal tests. They are indicative and do not constitute a definite guarantee of the properties shown. The information provided is an indication and cannot be regarded as binding. We recommend that you carry out verification tests yourself before using the product.

DISTRIBUTOR

SCP
Rubber Solutions

SCP Ltd | ul. Turystyczna 1, 43-155 Bieruń | www.scp1.pl